

HYCON HWP3 SUBMERSIBLE PUMPS

VARIABLE PUMP SPEED

HANDLES DIRTY WATER AND SOLIDS



PRODUCT FEATURES

The HWP3 water pump weighing only 11 kg, has a capacity of up to 85 m³/h per hour, making it extremely powerful compared to its weight.

With an outside diameter of only 30 cm, this 3" pump is suitable for many applications and even for narrow workspaces.


The VORTEX design ensures a long lifetime and no downtime, even in the demanding construction business. The direct drive motor ensures an all-day, everyday operation without damage to the engine or the seals if the pump runs dry.

HYDRAULIC SUBMERSIBLE PUMP HWP3

Item no.	3030003	3030003-01
Strainer	Standard	Fine
10 m discharge hose kit incl. 3" BSP male coupling	4032698	4032698
Weight [kg / lbs]	11 / 24.2	11 / 24.2
Dimensions L x W x H [mm / inch]	308 x 227 x 410 / 12 x 9 x 16	308 x 227 x 410 / 12 x 9 x 16
Oil flow [LPM / GPM]	12 x 9 x 16	12 x 9 x 16
Max pressure [bar / psi]	20 - 30 / 5 - 8	20 - 30 / 5 - 8
Max flow capacity [m ³ / h / GPM]	172 / 2500	172 / 2500
Max head [m / ft]	85 / 374	85 / 374
Max size of solid particles Ø [mm / inch]	20 / 66	20 / 66
Outlet size and connection, female thread	63 / 2.5	10 / 0.4
Outlet size and connection, female thread	BSP 3"	BSP 3"



HYCON HWP3 PERFORMANCE CURVE

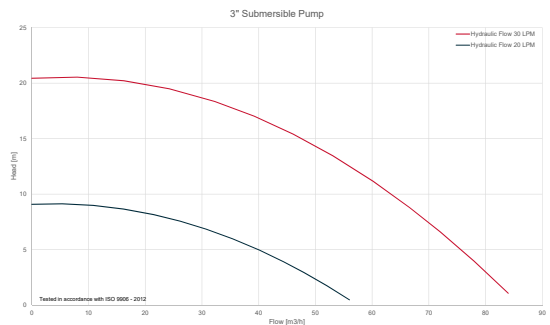

PLEASE NOTE: Discharge hose kit is not included.

THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS · CORE DRILLS · POST DRIVERS · PICK HAMMER · LIGHT & HEAVY DUTY BREAKERS
SUBMERSIBLE PUMPS · ROCK DRILLS · UNDERWATER EQUIPMENT · GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel.: +45 9647 5200
Mail: hycon@hycon.dk
www.hycon.dk

DISTRIBUTOR: